

504 250

15 METERS MAXIMUM HOSE CAPACITY

**Full metal Intensive Duty double pedestal hose reels, with hose capacity up to 15 m x 1/2" hose.**



### FLUIDS HANDLED


- Air.
- Water.
- Antifreeze and Windshield Wash Solutions.
- High Pressure Hot Water.
- Synthetic and Mineral Oils.
- Grease.

### MARKETS / APPLICATIONS

- Car and truck dealers.
- Service shops.
- Fleets.
- Lube trucks.
- Mining and construction.
- Railroad and mass transit.
- General manufacturing.

### MOUNTING

- Floor.
- Wall.
- Ceiling.
- Tank.

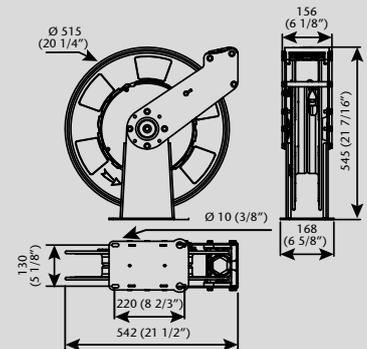

Dimensions mm (inches)

- Very tough construction able to stand regular use and abuse in Intensive Duty applications.
- Fatigue resistant steel spring for years of durable performance and even load when pulling and recoiling the hose.
- Full port shaft and swivel for no restrictions.
- Spool mounted on two permanent lubricated and sealed ball bearings to reduce torque load on spring for smooth retraction and longer life.
- Large effective radial latching area for easier operation.
- Hose guide arm can be placed in different positions to accommodate any method of mounting.
- Narrow footprint allows accommodating more reels on the same surface.
- Hose reels with hose include 0,8 m inlet hose.



Reel with arms in ceiling mounting position.

PART No.	BARE REEL	HOSE IN Ø	HOSE LENGTH	CONNECTING HOSE INLET	DELIVERY HOSE OUTLET	PRESSURE RATING	WEIGHT (With hose)
<b>AIR / WATER / ANTIFREEZE SOLUTIONS</b>							
<b>504 150</b>	<b>504 159</b>	1/2"	15 m	1/2" BSP (M)	1/2" BSP (M)	15 bar	24 kg
<b>SYNTHETIC AND MINERAL OILS</b>							
<b>504 250</b>	<b>504 259</b>	1/2"	15 m	1/2" BSP (M)	1/2" BSP (M)	160 bar	24 kg
<b>GREASE AND HYDRAULIC FLUID</b>							
<b>504 350</b>	<b>504 359.001</b>	1/4"	15 m	1/4" BSP (M)	1/4" BSP (M)	350 bar	27,5 kg
<b>504 351</b>	<b>504 359</b>	3/8"	15 m	3/8" BSP (M)	1/4" BSP (M)	280 bar	26 kg
<b>HIGH PRESSURE HOT WATER (UP TO 100 °C)</b>							
<b>504 450</b>	<b>504 459</b>	3/8"	15 m	3/8" BSP (M)	1/4" BSP (M)	170 bar	26 kg